




PIE Bearing Technology Co., Ltd

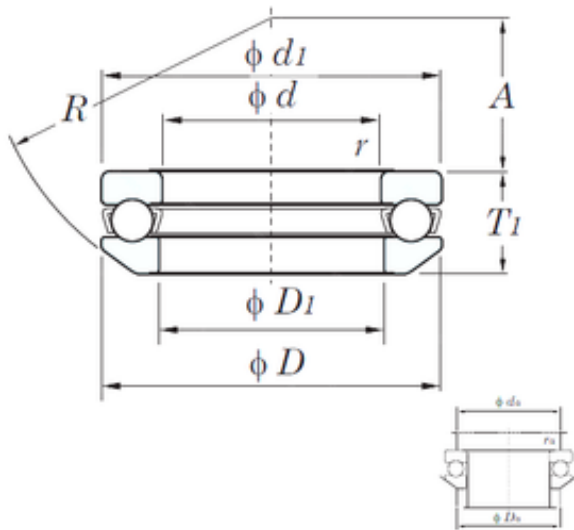

KOYO 53324 thrust ball bearings

Bearing No. 53324

| | |
|-------------------------------|-----------------|
| Size | 120x210x74.1 mm |
| Bore Diameter | 120 mm |
| Outer Diameter | 210 mm |
| Width | 74,1 mm |
| d | 120 mm |
| D | 210 mm |
| T1 | 74,1 mm |
| d1 | 205 mm |
| r min. | 2,1 mm |
| A | 63 mm |
| D1 | 123 mm |
| R | 160 mm |
| da min. | 173 mm |
| Da max. | 157 mm |
| ra max. | 2 mm |
| Weight | 10,4 Kg |
| Basic dynamic load rating (C) | 311 kN |
| Basic static load rating (C0) | 869 kN |
| (Grease) Lubrication Speed | 710 r/min |
| Bearing No. | 53324 |
| T | 74.1 |
| r(min) | 2.1 |
| Ca | 389 |
| Coa | 869 |
| Cu | 30.5 |
| Grease lub. | 710 |

53324 Bearing 2D drawings and 3D CAD models



PIE Bearing Technology Co., Ltd

| | |
|------------------|------|
| Oil lub. | 1100 |
| d1(max) | 205 |
| D1(min) | 123 |
| D2(min) | - |
| D3(min) | - |
| C | - |
| da(min) | 173 |
| Da(max) | 157 |
| ra(max) | 2 |
| (Refer.)Mass(kg) | 10.4 |